


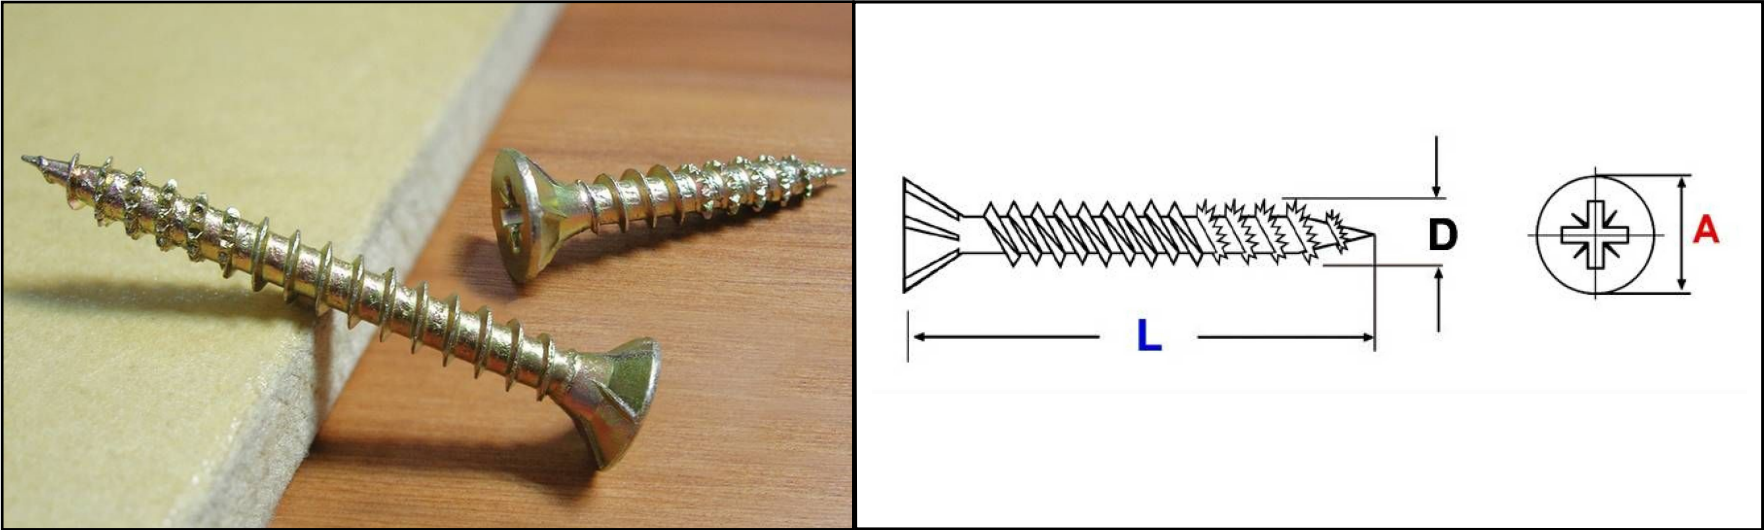

TORNILLO PARA MADERA AGLOMERADA

Código	Diámetro	Largo "L" (MM)	Envase	Diámetro Cabeza "A"	Diámetro Rosca "D"	Numero Punta	Torque * Instalación	
Zincado Iridiscente								
50TMPA	#3[2.5]	10	1 G	4.7 - 5.1	2.2 - 2.5	1	0,98	
51TMPA		12						
01TMPA	#5[3.0]	12	1 G	5.7 - 6.0	2.7 - 3.0	1	1.46	
20TMPA		16						
02TMPA		20						
21TMPA		25						
31TMPA		30						
32TMPA		35						
33TMPA		40						
34TMPA		45						
03TMPA	#6[3.5]	12	1 G	6.6 - 7.0	3.2 - 3.5	2	1.95	
04TMPA		16						
05TMPA		20						
06TMPA		25						
07TMPA		30						
35TMPA		35						
08TMPA		40						
36TMPA		45						
37TMPA	50							
09TMPA	#8[4.0]	20	1 G	7.6 - 8.0	3.7 - 4.0	2	2.93	
10TMPA		25						
11TMPA		30						
38TMPA		35						
12TMPA		40						
39TMPA		45						
22TMPA		50						
23TMPA		60						
44TMPA	#9[4.5]	20	1 G	8.6 - 9.0	4.2 - 4.5	2	4.31	
24TMPA		25						
16TMPA		30						
40TMPA		35						
17TMPA		40						
41TMPA		45						
18TMPA		50						
19TMPA		65						
25TMPA	75							
48TMPA	80							
49TMPA	100/75 **							
26TMPA	#10[5.0]	30	1 G	9.6 - 10	4.7 - 5.0	2	5.97	
42TMPA		35						
27TMPA		40						
43TMPA		45						
28TMPA		50						
46TMPA		60						
29TMPA		65						
30TMPA		75						
47TMPA		80						
45TMPA		100/75 **						
Empaque: Baldes plásticos								
04TMPA	#6[3.5]	16	1.000 U	6.6 - 7.0	3.2 - 3.5	2	1.95	
08TMPA		40	700 U					
12TMPA	#8[4.0]	40	600 U	7.6 - 8.0	3.7 - 4.0	2	2.93	
22TMPA		50	400 U					
30TMPA	#10[5.0]	75	200 U	9.6 - 10	4.7 - 5.0	2	5.97	

* En Nm
** Segunda cota corresponde a longitud de rosca